


CUSTOMER-INSTALLED CONDUIT UNDER RETAINING WALL

7.02.1

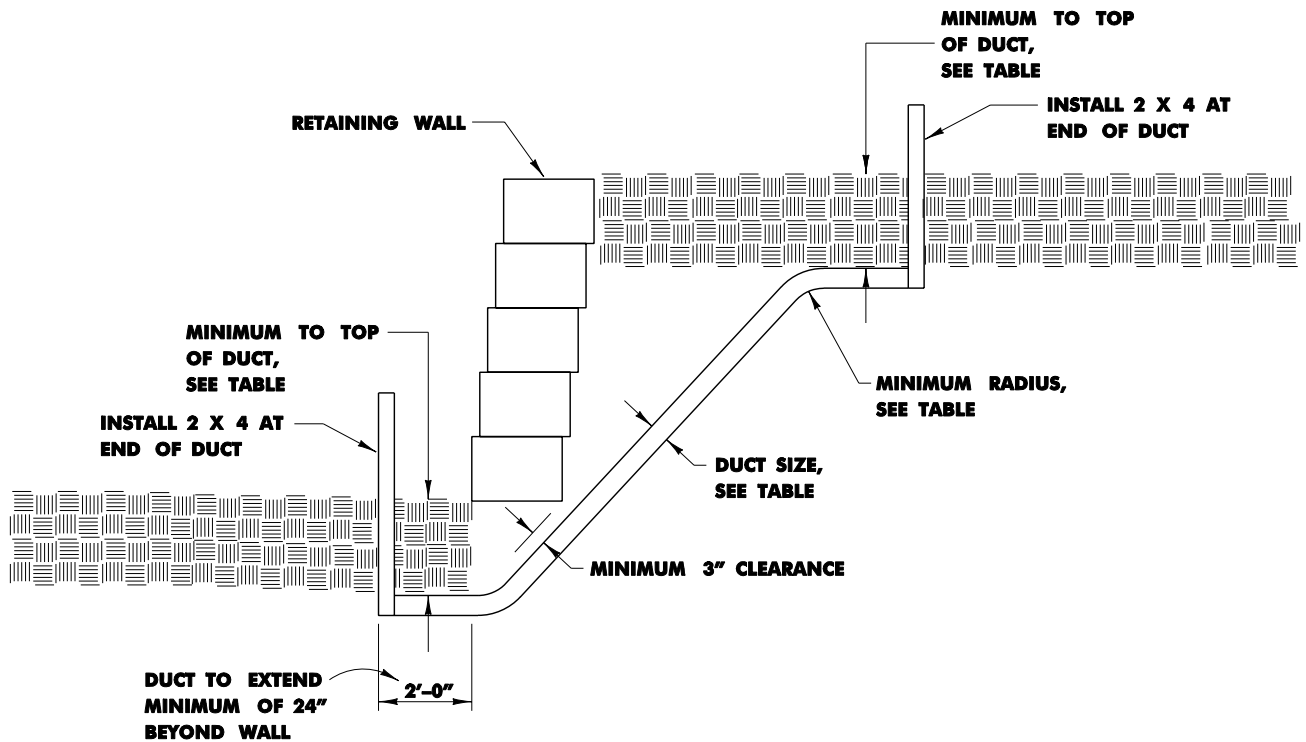

TABLE

CABLE	MINIMUM COVER OVER DUCT	MINIMUM RADIUS OF ALL BENDS	DUCT SIZE
600V OR LESS 200A HOUSE SERVICE	24 INCHES	24 INCHES	2 1/2 INCHES
320A HOUSE SERVICE	24 INCHES	24 INCHES	3 INCHES
OVER 600V	42 INCHES	36 INCHES	4 INCHES