

1Ø SURFACE TYPE METER SOCKET


120/240 VOLT 3 WIRE 320 AMPERES

UNDERGROUND SERVICE

GENERAL SERVICE ONLY

8.04.2

M131
M131D

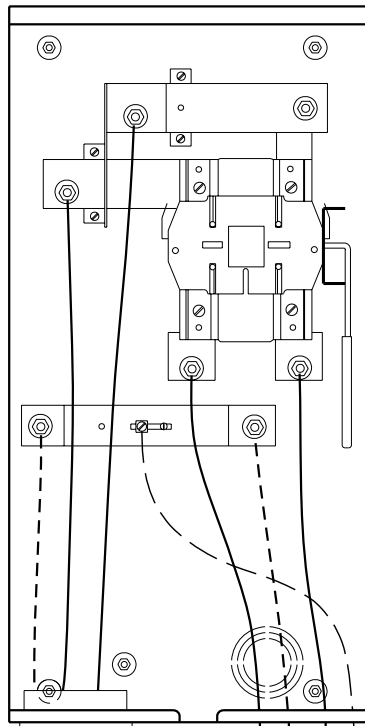


NOTES:

SOURCE:
SINGLE LUG - 350 KCMIL TO 500 KCMIL

LOAD:
SINGLE LUG - 500 KCMIL
DOUBLE LUG - 350 KCMIL

ALL GENERAL SERVICE SELF CONTAINED
METER SOCKETS SHALL INCLUDE A
LEVER BY-PASS

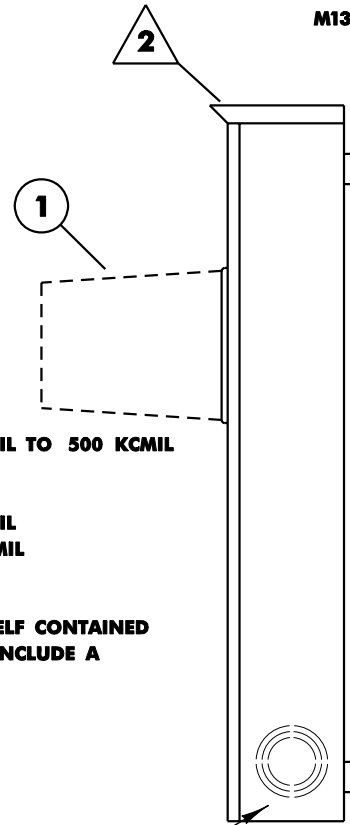

SIDE VIEW
COVER IN PLACE

3 KNOCKOUTS FOR 2" TO 2 1/2"
CONDUIT IN SIDES AND BACK


3" RIGID GALVANIZED CONDUIT WITH
NON-METALLIC BUSHING BY CUSTOMER
IN ALL NON-RESIDENTIAL & MULTI-TENANT
RESIDENTIAL APPLICATIONS

FRONT VIEW

COVER REMOVED

THIS KNOCKOUT FOR
OPPD USE ONLY

THIS KNOCKOUT FOR
OPPD USE ONLY

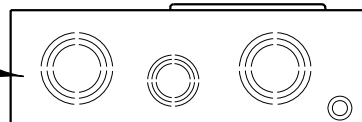

BOTTOM VIEW

2 KNOCKOUTS FOR 1 1/2" TO 3" CONDUIT
1 KNOCKOUT FOR 1 1/2" TO 2 1/2" CONDUIT
1 KNOCKOUT FOR 1/4" AND 1/2" EQUIPMENT GROUND

REFER TO DWG: 4.02.7